

SonoDefense


Advanced Cybersecurity and Data Privacy Protection

Healthcare institutions are under growing threat of cyberattack – and the implications for data security, patient privacy, and the quality and cost of care are staggering.

Protecting against these threats and safeguarding your patients and your institution requires more than anti-virus protection. SonoDefense is GE Healthcare's multi-layer strategic approach to cybersecurity and patient data privacy for ultrasound.

It is designed to:

- Keep the ultrasound machine safe and functional in the face of cyberthreats
- Protect patient data on the machine from unauthorized access
- Enable you to successfully implement HIPAA and security policies, while still managing productive daily workflows

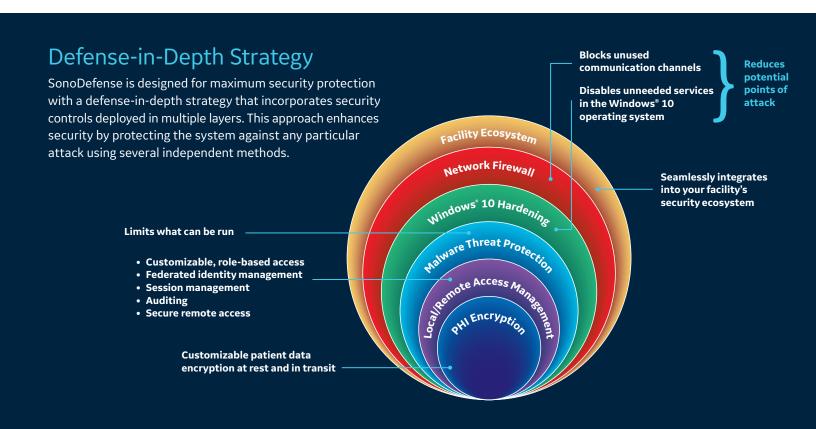

The SonoDefense Defense-in-Depth strategy consists of six layers, with each layer enhancing the overall security of the system to help protect patient data.

LAYER 1: Facility Ecosystem

SonoDefense is designed to fit seamlessly into your facility's existing security ecosystem. Vulnerability scan mode allows the scanner to be integrated into a facility's vulnerability assessment infrastructure¹ and syslog⁴ connectivity allows for integration into the Security Information and Event Management (SIEM) infrastructure.

LAYER 2: Network Firewall

A malicious cyberattack requires a point of entry. The strict firewall layer reduces the potential points of attack by disabling all unused ports and the DICOM® firewall limits DICOM connections to customer-defined devices.

LAYER 3: Windows 10 Hardening

Windows 10 IoT is a version of Windows 10 specifically made for embedded systems with an extended support model. Its applications are vast compared to the needs of the SonoDefense-enabled scanner. Accordingly, we have configured the system so that all software services embedded in the operating system that are not explicitly needed to run the medical applications are removed or blocked by Windows Defender Application Control (WDAC). This "hardening" is linked to Unified Extensible Firmware Interface (UEFI) and Trusted Platform Module (TPM) components, minimizing the parts of the system that are exposed to threats and helping reduce the potential for attack. The Windows 10 IoT configuration, including security profiles, is set using guidance from standards including Defense Information Systems Agenda (DISA) Standard Technical Implementation Guides (STIGs), National Institute of Standards and Technology (NIST) Cybersecurity Framework, and Center for Internet Security (CIS) best practices.

LAYER 4: Malware Threat Protection

The Windows 10 security features provide the foundation for SonoDefense's malware protection, enforcing restrictions on applications that can be run on the ultrasound scanner.

- Known malicious software and potentially unwanted applications (PUAs) are explicitly blocked
- WDAC only permits trusted applications that meet secure implementation guidelines to run on the ultrasound system
- Kiosk mode disables the user's access to the internet and the Windows desktop, which are common malware vectors for spreading viruses through email services, web browsers, and other applications
- Media auto-run is disabled and BIOS access requires a password
- · Security tools actively monitor for malware behavior

LAYER 5: Local/Remote Access Management

SonoDefense provides cyberdefense for the real world of patient care. Its extensive, customizable, role-based user access enables users to successfully implement HIPAA and security policies while still ensuring efficient and productive daily workflows.

- **User roles** Custom creation of user roles and assignment rights for roles puts the institution in control
- **User management** Individual users are created and assigned customizable roles, dictating their allowable access to and manipulation of patient data and system configuration
- Password policies Policies include length and content
- Federated identity management Lightweight Directory Access Protocol (LDAP), or single sign-on, can be used to manage users consistently across your enterprise
- **Session management** System access can be restricted after a period of inactivity
- Audit report An extensive list of events, including patient data and system access, are recorded in an audit log to facilitate an incident investigation
- Centralized logging support⁴ Supports industry standard syslog protocol with optional encryption for transmitting system and audit logs to customer-controlled log server
- **Remote service access** Remote service is only allowed if authorized by local user on device
- Local service access Protected by a two-factor authentication scheme

LAYER 6: PHI Encryption

The encryption layer of SonoDefense security software is designed to protect data privacy and assist your organization in complying with HIPAA/HITECH regulations. Safeguards include:

- Data on the system's customer data volumes can be encrypted to provide protection in the event of a stolen device or hard drive
- Patient data can be deleted from the hard drive in a way that is cryptographically unreadable and unrecoverable
- Support for IPv6 includes IP Security (IPsec) for encrypted networking communication and node authentication
- DICOM Transport Layer Security (TLS) encrypts both wired and wireless DICOM communications²
- Wireless network communication can be encrypted with industry standard protocols²
- All remote service access is encrypted using FIPS compliant algorithms

Security-related features for LOGIQ[™] Utrasound Scanners³

All features are standard unless otherwise noted

Firewall policy blocks all unnecessary ports and limits DICOM communications to only defined devices.

OS – Windows 1) IoT	Access and A	access Level (cont.)	
OS Hardening	 Configuration settings use guidance from DISA STIGs, NIST Cybersecurity Framework, and CIS best practices Disables unnecessary services, protocols, and telemetry Secure boot 		 Usage (enabled or disabled) Policies – provides the ability to specify password policies for application user accounts Password cannot contain user name (on/off) 	
Media Export Security	 Provides the ability to disable export of patient data to removable media and is configurable at system level or individual user level 		 Password history (0-25) Minimum password length (1-20 characters) Minimum password age (0-168 hours) Maximum password age (30-365 days) Password complexity Minimum number of character sets (0-4) Minimum number of upper case characters (0-3) Minimum number of lower case characters (0-3) Minimum number of digits (0-3) Minimum number of symbols (0-3) Controls on repeated and sequential characters (0-5)⁴ Most commonly used passwords identified in Open Web Application Security Project 	
Malware Protection	 Explicit blocking of known malicious software and PUAs Windows Defender Application Control (WDAC) Disables auto-run for removable media Kiosk mode Windows Defender Antivirus 	Passwords		
Access and Acc			Most commonly used passwords identified	
	strator rights to configure)			
(Requires admini	strator rights to configure)	Account Lockout Policies	Most commonly used passwords identified in Open Web Application Security Project	
(Requires administration Ability to create Ability to assign patient data access rights to	estrator rights to configure) user groups • Create • Update/Access • Delete	Lockout	 Most commonly used passwords identified in Open Web Application Security Project (OWASP) list can be prohibited⁴ Failed logins before account blocked (off, 1-10) 	
(Requires administry) Ability to create Ability to assign patient data access rights to each group Ability to assign other rights	user groups Create Update/Access Delete Export (removable media) Administrator Configuration adjustments Basic Imaging Advanced Audit and system logs Capture Capture with PHI	Lockout Policies Session	 Most commonly used passwords identified in Open Web Application Security Project (OWASP) list can be prohibited⁴ Failed logins before account blocked (off, 1-10) Account block time (0-60 minutes) Lock screen timeout – automatically locks screen and requires password reentry after specified period of inactivity (disabled, 1-60 minutes) Auto logoff timeout – automatically logs off a user after the specified period of inactivity (disabled, 1-60 minutes) 	

Security-related Features (cont.)

All features are standard unless otherwise noted

Local User Management Policy (Requires administrator rights to configure)			
User management restricted to administrator rights			
Local user management			
User display ID can be unique from login ID			
Ability to temporarily disable a user			
Ability to force a password reset			
Support for multiple unique user accounts			
Support for multiple unique administrator accounts			
Can combine with remote users			

Remote User Management Policy (Requires administrator rights to configure)			
Supports active directory authentication utilizing LDAP			
Support for individual accounts and AD groups for users and administrators			
May utilize LDAP or secure LDAP			
Customer may configure the system to perform authenticated binding			
Can combine with local users			

Customizable mapping to local groups for rights management

Dome	to So	ruico /	Access
Remo	ite sei	rvice <i>F</i>	access

FIPS 140-2 compliant encryption

Remote control is only allowed if authorized by local user on device

No inbound open ports required

Auditing

Audit and system log creation with or without PHI⁴

Sample		
Audit Events		

- System startup and shutdown
- User login and logout
- Transfer of DICOM instances
- Data import/export
- Display, modification, and deletion of images and patient information
- User management events
- Network, security, and system configuration changes

Additonal Features					
Local Service Access	Secure Service Access (SSA)				
Windows Local User Accounts	Passwords for all accessible accounts may be changed				
Hard Drive Encryption ⁵	 AES-256/AES-128 Automatic unlock tied to system hardware⁴, USB key, pre-boot PIN,^{4,5} or manual password entry 				
Syslog client for distributed log file processing ⁴					
Wireless Security Protocols⁵	 WPA2-Personal WPA2-Enterprise 802.1x Enforced FIPS 140-2 compliance capability 				
Internet Protocol Address Standard	IPv4IPv6				
Secure delete to rend and unrecoverable	ler deleted patient data unreadable				
DICOM TLS					
Vulnerability Scan Mode ¹	• Nessus®				
Software Security Updates ^{4,5}	 Customer can download and install digitally signed software security updates on the system 				

References

- 1. Vulnerability scan mode is an optional system feature and is available on LOGIQ E10/E10s and LOGIQ Fortis only.
- 2. Wireless connectivity is an optional system feature.
- Unless otherwise noted, the SonoDefense feature set described in this document applies to: LOGIQ E10/E10s R2 software, LOGIQ E10/E10s, LOGIQ Fortis R3 software, LOGIQ S8 R4.2.5x software, and LOGIQ P9/P7 R3.0.8.
- 4. Not available on LOGIQS8.
- 5. Not available on LOGIQ P10/P9/P8.
- 6. Only available on the patient data drive on LOGIQ S8/P10/P9/P8.

Product may not be available in all countries and regions. Full product technical specification is available upon request. Contact a GE Healthcare Representative for more information. Please visit www.gehealthcare.com/promotional-locations. Data subject to change.

© GE, 2022

GE, the GE Monogram, and LOGIQ are trademarks of General Electric Company. DICOM is a trademark of the National Electrical Manufacturers Association.

Windows is a registered trademark of Microsoft Corporation.

Nessus is a registered trademark of Tenable Network Security, Inc.

Reproduction in any form is forbidden without prior written permission from GE. Nothing in this material should be used to diagnose or treat any disease or condition. Readers must consult a healthcare professional.

April 2022 JB19675XX

